

# TMRWD7L Torque Motor



## Electrical specifications

| Winding code : SD                 | Symbol   | Unit           | Free air convection         | Water cooling |
|-----------------------------------|----------|----------------|-----------------------------|---------------|
| Continuous torque                 | $T_c$    | Nm             | 430                         | 930           |
| Continuous current                | $I_c$    | $A_{rms}$      | 24                          | 60            |
| Stall torque                      | $T_s$    | Nm             | 301                         | 651           |
| Stall current                     | $I_s$    | $A_{rms}$      | 16.8                        | 42            |
| Peak torque(for 1sec.)            | $T_p$    | Nm             | 1072.7                      | 1760          |
| Peak current(for 1sec.)           | $I_p$    | $A_{rms}$      | 72                          | 162           |
| Torque constant                   | $K_t$    | Nm/Arms        | 18.1                        |               |
| Electrical time constant          | $T_e$    | ms             | 7.1                         |               |
| Resistance (line to line at 25°C) | $R_{25}$ | $\Omega$       | 0.76                        |               |
| Inductance (line to line)         | $L$      | mH             | 5.38                        |               |
| Number of poles                   | 2p       |                | 88                          |               |
| Back emf constant (line to line)  | $K_v$    | Vrms/rad/s     | 10.43                       |               |
| Motor constant (at 25°C)          | $K_m$    | Nm/ $\sqrt{W}$ | 16.78                       |               |
| Thermal resistance                | $R_{th}$ | K/W            | 0.14                        | 0.023         |
| Thermal sensor                    |          |                | PTC<br>SNM100+SNM120+Pt1000 |               |
| Max. DC BUS                       |          | $V_{DC}$       | 750                         |               |
| Inertia of rotor                  | $J$      | $kgm^2$        | 0.37                        |               |
| Thermal time constant             | $T_{th}$ | s              | 3940                        | 160           |
| Max. continuous power dissipation | $P_c$    | W              | 898                         | 5616          |
| Max. peak power dissipation       | $P_p$    | W              | 40940                       |               |
| Rated speed(at 600VDC)            |          | rpm            | 200                         |               |



## Mechanical specifications

|  | Symbol         | Unit  | Free air convection | Water cooling |
|--|----------------|-------|---------------------|---------------|
| Mass of rotor                          | $M_r$          | kg    | 12.8                |               |
| Mass of stator                         | $M_s$          | kg    | 53.2                |               |
| Height of stator                       | $H_s$          | mm    | 130                 |               |
| Height of rotor                        | $H_r$          | mm    | 71                  |               |
| Length of rotor centring fit           | $H$            | mm    | 15                  |               |
| Water temperature difference for $P_c$ | $\Delta\theta$ | K     | -                   | 5             |
| Minimum water flow                     | $q$            | l/min | -                   | 16.1          |
| Max. pressure drop                     | $\Delta p$     | bar   | -                   | 1             |

## T-N curve

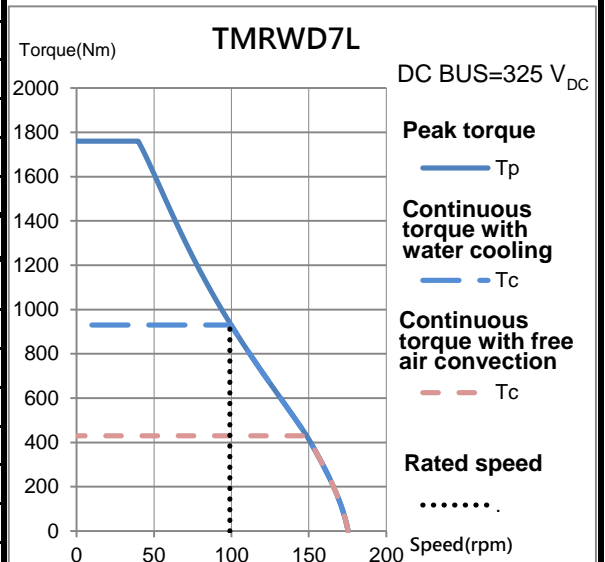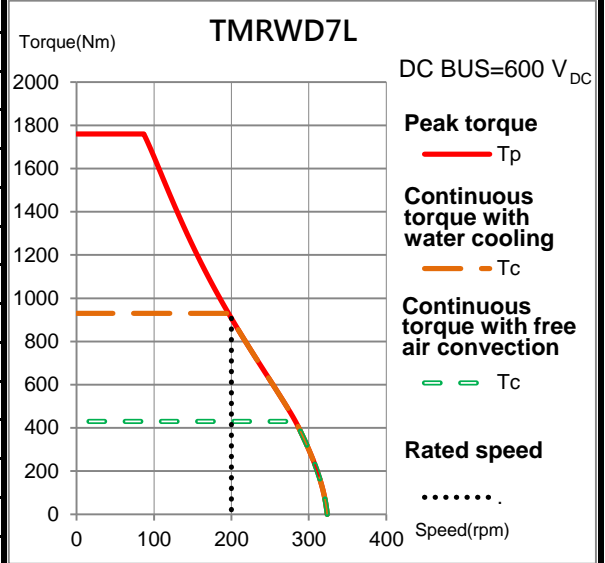

## Thermal sensor

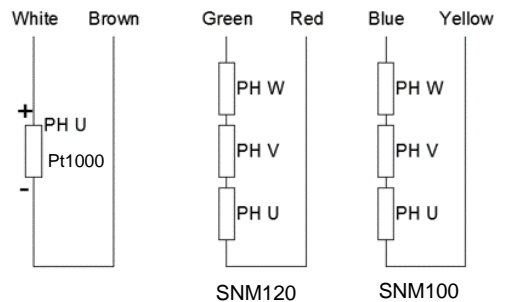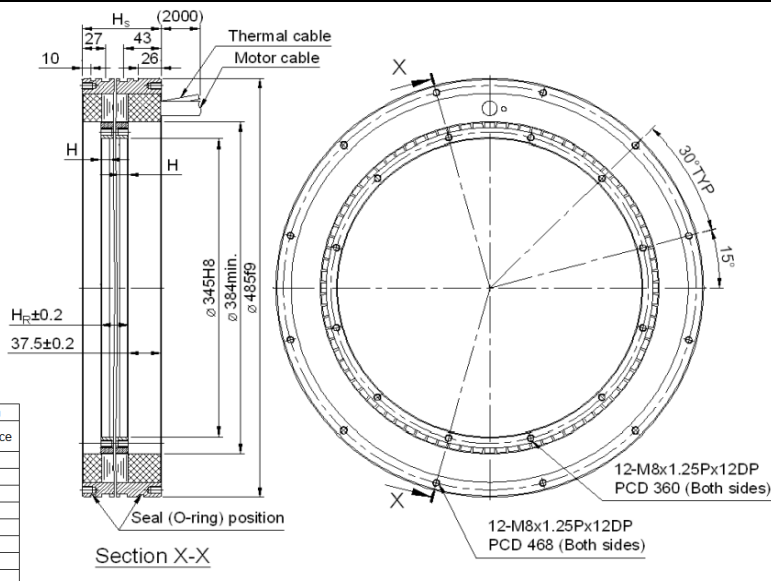

| General tolerance mm |           |
|----------------------|-----------|
| Nominal dimension    | Tolerance |
| ~ 6                  | $\pm 0.1$ |
| > 6 ~ 30             | $\pm 0.2$ |
| > 30 ~ 120           | $\pm 0.3$ |
| > 120 ~ 300          | $\pm 0.4$ |
| > 300 ~ 600          | $\pm 0.5$ |
| > 600 ~ 1200         | $\pm 0.8$ |
| > 1200 ~ 2400        | $\pm 1.0$ |
| > 2400               | $\pm 1.5$ |

| Motor wire table  |        |
|-------------------|--------|
| Color or wire no. | Signal |
| U/L1              | PH U   |
| V/L2              | PH V   |
| W/L3              | PH W   |
| Green/Yellow      | GND    |

Except dimensions, all the specifications in the table are in  $\pm 10\%$  of tolerance

Version: 2.00

This drawing is only for reference, detail dimensions please refer to approval drawing.

Date: 2020/10/23